

# PHILIPS

## Lighting



## TL-X XL

### TL-X XL 40W/33-640 SLV/25

The TL-X XL lamp (tube diameter 38 mm) has an extended lifetime and is fitted with an internal ignition strip for electromagnetic starterless operation or high-frequency non-preheat operation. In combination with a special lampholder, all possible sparking effects during ignition are eliminated. This lamp is used in flameproof and increased-safety luminaires for both indoor and outdoor applications, such as the (petro-)chemical industry, offshore, mines and any location where traces of explosive gases may be found.


#### Product data

General Information		Lamp Current (Nom)		0.430 A	
Cap-Base	FA6 [ FA6]	Voltage (Nom)	103 V		
Life To 10% Failures (Nom)	21000 h	<b>Controls and Dimming</b>			
Life To 50% Failures (Nom)	26000 h	Dimmable	Yes		
<b>Light Technical</b>		<b>Approval and Application</b>			
Color Code	33-640	Energy Efficiency Label (EEL)	B		
Luminous Flux (Nom)	2300 lm	Mercury (Hg) Content (Nom)	12.0 mg		
Color Designation	Cool White (CW)	Energy Consumption kWh/1000 h	47 kWh		
Lumen Maintenance 10000 h (Nom)	0 %	<b>Product Data</b>			
Lumen Maintenance 2000 h (Nom)	88 %	Full product code	871150026137340		
Lumen Maintenance 5000 h (Nom)	83 %	Order product name	TL-X XL 40W/33-640 SLV/25		
Chromaticity Coordinate X (Nom)	377	EAN/UPC - Product	8711500261373		
Chromaticity Coordinate Y (Nom)	381	Order code	928037903332		
Correlated Color Temperature (Nom)	4100 K	Numerator - Quantity Per Pack	1		
Luminous Efficacy (rated) (Nom)	58 lm/W	Numerator - Packs per outer box	25		
Color Rendering Index (Nom)	63	Material Nr. (12NC)	928037903332		
<b>Operating and Electrical</b>		Net Weight (Piece)	233.000 g		
Power (Rated) (Nom)	39.0 W				

**Warnings and Safety**

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


**Dimensional drawing**

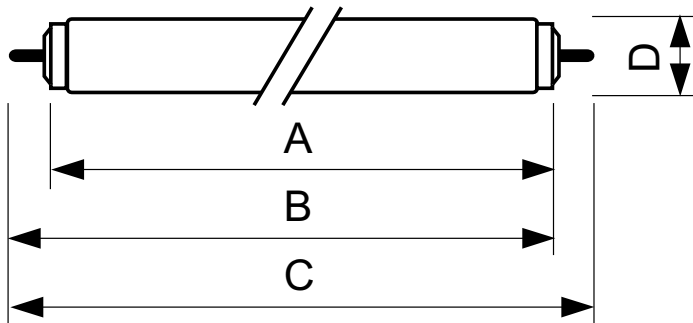


Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-X XL 40W/33-640 SLV/25	40.5 mm	1183.5 mm	1202 mm	1198.5 mm	1220.5 mm

TL-X XL 40W/33-640

**Photometric data**

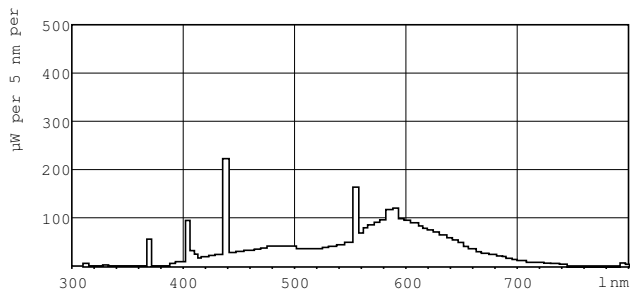

Lightcolor /33-640

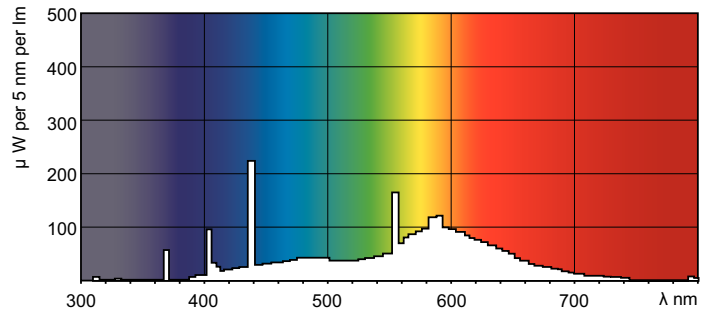

Lightcolor /33-640

