

**VAPOURLITE 2FT IP65 IK08 10W/17W 4000K/5000K/6500K 120 BEAM ANGLE
130LM/W NON_DIMM**

ILBTD201

**Details**

Quick Order Code:	422166
Barcode:	5055788267386
Category:	Luminaires
Range Name:	Vapourlite
Type:	Single / Twin
Product Body Finish:	Grey
Market Segment:	Commercial indoor and outdoor, Industrial indoor and outdoor
Features:	Power & CCT Switchable
Warranty (Years):	5
CE RoHS:	Yes

Physical Data

Product Length (mm):	605
Product Depth (mm):	71
Product Width (mm):	82
Product Weight (g):	746
Optic:	Polycarbonate diffuser
Material:	Polycarbonate
Construction:	Injection moulding
Bulb or Luminaire Shape:	Linear
Luminaire Fixing:	Ceiling mounted
Placement / Application:	Indoor, Commercial and Industrial

Electrical Data

Power Consumption (W) :	10 & 17
Power Factor:	0.9
Input Voltage (V):	200-240
Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
EN:	EN-60598



LVD Certified: Yes

Light Data

Luminous Flux in Lumens (lm): 1300 to 2210
Correlated Colour Temperature (CCT) (K): 4000/5000/6500
Colour Temperature: 4000/5000/6500
Colour Temperature Name: CCT Switchable
Beam Angle: 120
Colour Rendering Index (CRI): 80
Frequency Range (Hz): 50/60
Instant on (Less than 1 second): Yes
LED Size (mm): 2835
LED Type: Surface mounted device (SMD)
Lifetime (hours): 50000
Switching Cycles: 25000

Environment

EN: EN-60598
LVD Certified: Yes
CE RoHS: Yes
New Energy Rating: E
EU Luminaire: L
Hg 0% (Mercury Free): Yes
IK Rating (Impact Protection): IK08
IP Rating (Ingress Protection): 65
Lowest Operating Temperature (°C): -20
Maximum Operating Temperature (°C): 40

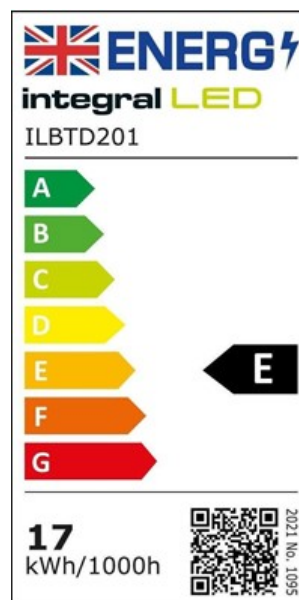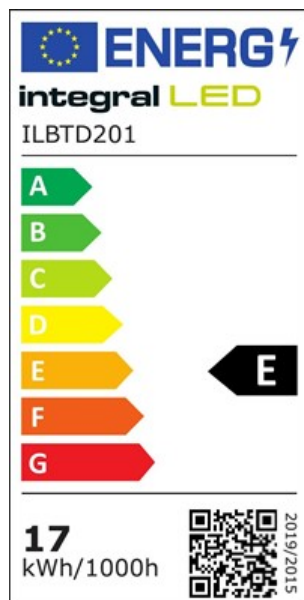

Packaging

Package Weight (g): 846
Package Length (mm): 610
Package Width (mm): 86
Package Depth (mm): 76

[Portal.integral-led.com](https://portal.integral-led.com)

Portal.integral-led.com

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE